
Data Sheet

Item
3002


1. Product description:

Sandpaper Sheet


Dimensions (in):	9" x 11"
Dimensions (mm):	230 x 280
Specification:	AASA-80
Grit:	80
Abrasive:	Aluminum Oxide
Backing:	C-weight Waterproof Paper
Structure:	Semi-Open Coat

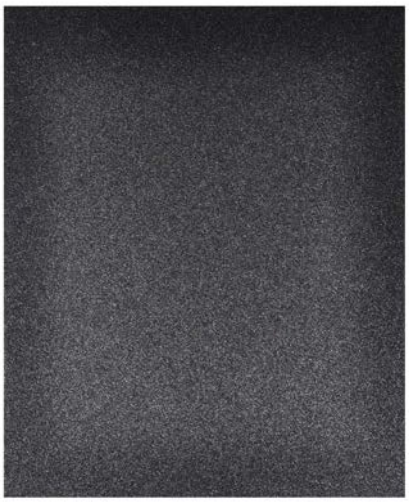

HL



A = 230 mm
L = 280 mm







Made in Germany

Individually Barcoded

Manual Use

1. Application

• For sanding paint, body filler, primer, ferrous and non-ferrous metals, plastics, wood, and textiles.
• Extra-high performance with excellent stock removal capacity.
• Tear-resistant, clog-resistant, and minimizes abrasive grain shedding.
• Ideal for automotive refinishing applications.
• Excellent flexibility makes them ideal for contoured and irregularly shaped workpieces.
• Provides a uniform surface finish.

2. Operating instructions

• For hand sanding applications.
• Use with plenty of water during sanding. After use, soak the abrasive sheet in water to help restore its cutting action.

3. Safety information

• Always wear full personal protective equipment (gloves, hearing protection, mask/respirator, and safety goggles).
• Improper use may cause injury.

4. Handling

• Initial inspection must be carried out in the original packaging. If there is visible damage to the packaging, the product should not be accepted.
• Packages must not be exposed to hooks or sharp objects. They should not be stacked under excessive loads, as this may damage the product and cause breakage during use.

5. Storage

• All sanding products must be stored on pallets at least 10 cm above the floor, away from damp, cold, hot surfaces, or any type of fluid.
• Ideal storage conditions are 40–50% relative humidity and a temperature between 15 and 29 °C.

6. Packaging units

• 50 pieces.